


## General info

## Technical - Spotlights and Tracks

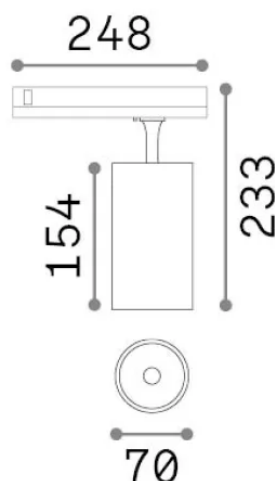

<b>Ean</b>	8021696340982
<b>Item</b>	FOX TR 3-PHASE 25W CRI90 4000K DALI WH
<b>Installation</b>	Spotlights and Tracks
<b>Warranty</b>	5 years
<b>Gross weight</b>	0.87 kg
<b>Volume</b>	0.004163 m <sup>3</sup>

## Technical info

<b>Net weight</b>	0.78 kg
<b>Insulation class</b>	II
<b>Protection index</b>	IP20
<b>Compliance</b>	CE
<b>Operating temperature</b>	0° ~ +40 °C
<b>Dimmer</b>	1, DALI
<b>Power output</b>	220-240 V AC 50/60 Hz
<b>Power supply</b>	In-built, included NO, electronic
<b>Accessories not included</b>	Link 3-phase 1-10V/DALI profile

## Source info

<b>Integrated source</b>	Integrated LED module
<b>Replaceable source</b>	Replaceable (by qualified operators only)
<b>Power</b>	25 W
<b>Emission</b>	Direct
<b>Max consumption</b>	max 25 W
<b>Features LED</b>	LED COB BRIDGELUX
<b>CCT LED</b>	4000 K
<b>Duration LED (t. 25°C)</b>	50000 h
<b>CRI</b>	> 90
<b>SDCM</b>	3
<b>Light beam</b>	35°
<b>Light beam flux</b>	3050 lm
<b>Useful light flux</b>	2310 lm
<b>Photobiological risk</b>	1
<b>Standby power</b>	< 0.50 W