


## General info


## Technical - Recessed lights

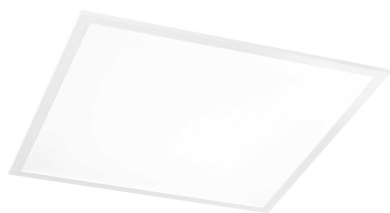

Ean	8021696249728
Item	LED PANEL FI 4000K CRI80
Installation	Recessed lights
Guarantee	5 years
Gross weight	2.7 kg
Volume	0.014431 m <sup>3</sup>

## Technical info

Net weight	2.2 kg
Insulation class	II
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Dimmer	NO, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	Separate, included Replaceable (by qualified operators only), electronic
Accessories not included	Dimmable driver, Mounting kit (Suspension kit, Surface kit, Plasterboard recessed frame)



## Source info

Integrated source	Integrated LED module
Replaceable source	Replaceable (by qualified operators only)
Power	40 W
Emission	Direct
Max consupcion	max 40,00 W
Features LED	LED SMD
CCT LED	4000 K
Duration LED (t. 25°C)	25000 h
CRI	> 80
Light beam	81°
UGR Maximum	< 19
Light beam flux	4450 lm
Useful light flux	3550 lm