


Info generali

Tecnico - Proiettori e Binari

Indoor track mounted adjustable non-dimmable projector with integrated LED sources and direct light emission

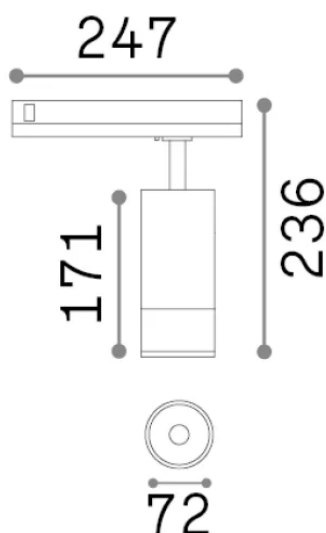

| | |
|----------------------|----------------------------------|
| Ean | 8021696303017 |
| Articolo | EOS TR 3-PHASE 25W 3000K DALI WH |
| Installazione | Proiettori e Binari |
| Garanzia | 5 years |
| Peso lordo | 1.15 kg |
| Volume | 0.004995 m ³ |

Info tecniche e installative

| | |
|--------------------------------|--------------------------------------|
| Peso netto | 1.05 kg |
| Classe di isolamento | II |
| Grado di protezione | IP20 |
| Conformità | CE |
| Temperatura d'esercizio | 0° ~ +40 °C |
| Dimmer | 1, DALI |
| Alimentazione | 220-240 V AC 50/60 Hz |
| Alimentatore | In-built, included NO, electronic |
| Accessori non inclusi | Link 3-phase 1-10V/DALI profile |

Info sorgente e prestazionali

| | |
|------------------------------|---|
| Sorgente integrata | Integrated LED module |
| Sorgente sostituibile | Replaceable (by qualified operators only) |
| Potenza | 25 W |
| Emissione | Direct |
| Consumo massimo | max 25 W |
| Caratteristiche LED | LED COB BRIDGELUX |
| CCT LED | 3000 K |
| Durata LED (t. 25°c) | 50000 h |
| CRI | > 90 |
| SDCM | 3 |
| Fascio luminoso | 20-55° |
| Flusso sorgente | 2950 lm |
| Flusso utile | 2070 lm |
| Rischio fotobiologico | 1 |
| Potenza in stand-by | < 0.50 W |