


## Info generali

## Tecnico - Lampade da incasso


Indoor ceiling recessed lamp with integrated LED sources and direct light emission

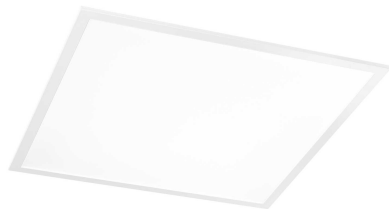

|                      |                          |
|----------------------|--------------------------|
| <b>Ean</b>           | 8021696249711            |
| <b>Articolo</b>      | LED PANEL FI 3000K CRI80 |
| <b>Installazione</b> | Lampade da incasso       |
| <b>Garanzia</b>      | 5 years                  |
| <b>Peso lordo</b>    | 2.7 kg                   |
| <b>Volume</b>        | 0.014431 m <sup>3</sup>  |

## Info tecniche e installative

|                                |   |
|--------------------------------|---|
| <b>Peso netto</b>              | 2.2 kg  |
| <b>Classe di isolamento</b>    | II  |
| <b>Grado di protezione</b>     | IP20  |
| <b>Conformità</b>              | CE  |
| <b>Temperatura d'esercizio</b> | 0° ~ +40 °C   |
| <b>Dimmer</b>                  | NO, On-Off  |
| <b>Alimentazione</b>           | 220-240 V AC 50/60 Hz   |
| <b>Alimentatore</b>            | Separate, included<br>Replaceable (by qualified operators only),<br>electronic              |
| <b>Accessori non inclusi</b>   | Dimmable driver, Mounting kit (Suspension kit,<br>Surface kit, Plasterboard recessed frame) |



## Info sorgente e prestazionali

|                              |   |
|------------------------------|---|
| <b>Sorgente integrata</b>    | Integrated LED module                     |
| <b>Sorgente sostituibile</b> | Replaceable (by qualified operators only) |
| <b>Potenza</b>               | 40 W                                      |
| <b>Emissione</b>             | Direct                                    |
| <b>Consumo massimo</b>       | max 40,00 W                               |
| <b>Caratteristiche LED</b>   | LED SMD                                   |
| <b>CCT LED</b>               | 3000 K                                    |
| <b>Durata LED (t. 25°C)</b>  | 25000 h                                   |
| <b>CRI</b>                   | > 80                                      |
| <b>Fascio luminoso</b>       | 81°                                       |
| <b>UGR massimo</b>           | < 19                                      |
| <b>Flusso sorgente</b>       | 4150 lm                                   |
| <b>Flusso utile</b>          | 3310 lm                                   |